

Zoom (2200mm)



C55x20R2Q-EP1B

55x Applicable camera (model) 1 2/3 1/2 1/3 1/4 For Surveillance

Day
Night



* Photograph is a similar model.

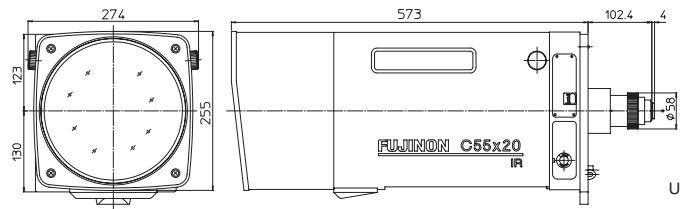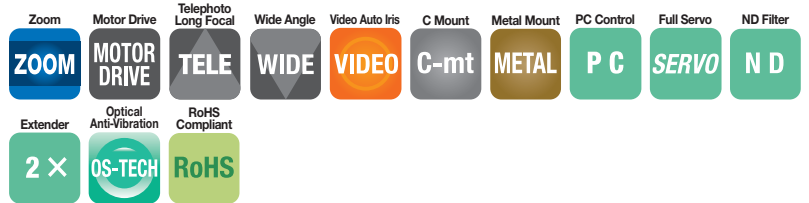

Unit : mm

C55x20R2Q-EP1B

		1x		2x																					
Focal Length (mm)		20 - 1100(55x)		40 - 2200(55x)																					
Iris Range		F3.0 - T1500(Equivalent to F1500)		F6.0 - T3000(Equivalent to F3000)																					
Operation	Zoom	Servo Control																							
	Focus	Servo Control																							
	Iris	Auto (Video Type) or Servo Control																							
Angle Of View (HxV)	1"	WIDE	35°29' × 26°59'		18°10' × 13°41'																				
		TELE	0°40' × 0°30'		0°20' × 0°15'																				
	2/3"	WIDE	24°49' × 18°44'		12°25' × 9°22'																				
		TELE	0°27' × 0°21'		0°44' × 0°10'																				
	1/2"	WIDE	18°10' × 13°41'		9°05' × 6°52'																				
		TELE	0°20' × 0°15'		0°10' × 0°08'																				
Focusing Range (From Front Of The Lens)(m)		∞ - 2.4																							
Object Dimensions at M.O.D. (HxV) (mm)	1"	WIDE	1400 × 1051		700 × 525																				
		TELE	25 × 19		13 × 10																				
	2/3"	WIDE	963 × 723		482 × 361																				
		TELE	17 × 13		9 × 7																				
	1/2"	WIDE	700 × 525		350 × 263																				
		TELE	13 × 10		6 × 5																				
Back Focal Distance (in air) (mm)		28.04		28.04																					
Exit Pupil Position (From Image Plane) (mm)		-163		-131																					
Mount		C																							
Extender		2x																							
Mass (kg)		21																							
Control Unit		CRD-40(Optional)																							
Remarks		•With Metal Mount [Electrical Specification] Power Supply: DC 12V (DC 11V to 16V) Power Consumption: 2.1A (Max.)																							
		<table border="1"> <thead> <tr> <th></th> <th>Zoom</th> <th>Focus</th> <th>Iris</th> <th>Extender</th> </tr> </thead> <tbody> <tr> <td>Control Signal</td> <td>TELE: 2.5V WIDE: 7.5V</td> <td>NEAR: 2.5V FAR : 7.5V</td> <td>AUTO / VIDEO (1Vp-p) / REMOTE / OPEN :7V, CLOSE:2V</td> <td>1x : ∞ 2x : + V</td> </tr> <tr> <td>Power Consumption</td> <td>670mA (Max.)</td> <td>670mA (Max.)</td> <td>100mA (Max.)</td> <td>220mA (Max.)</td> </tr> <tr> <td>Operating Time</td> <td>1s. (Max.)</td> <td>1s. (Max.)</td> <td>1s. (Max.)</td> <td>1s. (Max.)</td> </tr> </tbody> </table>					Zoom	Focus	Iris	Extender	Control Signal	TELE: 2.5V WIDE: 7.5V	NEAR: 2.5V FAR : 7.5V	AUTO / VIDEO (1Vp-p) / REMOTE / OPEN :7V, CLOSE:2V	1x : ∞ 2x : + V	Power Consumption	670mA (Max.)	670mA (Max.)	100mA (Max.)	220mA (Max.)	Operating Time	1s. (Max.)	1s. (Max.)	1s. (Max.)	1s. (Max.)
	Zoom	Focus	Iris	Extender																					
Control Signal	TELE: 2.5V WIDE: 7.5V	NEAR: 2.5V FAR : 7.5V	AUTO / VIDEO (1Vp-p) / REMOTE / OPEN :7V, CLOSE:2V	1x : ∞ 2x : + V																					
Power Consumption	670mA (Max.)	670mA (Max.)	100mA (Max.)	220mA (Max.)																					
Operating Time	1s. (Max.)	1s. (Max.)	1s. (Max.)	1s. (Max.)																					
		•Also available: C55x13.5R2Q-EP1B																							

Accessories

- Stabilize Adapter TS-C11

Near-infrared wavelength selected

