


# Zoom (1500mm)

### D60x12.5BE-V41

**60x** Applicable camera (mode) 1 2/3 1/2 1/3 1/4 **For Surveillance**



Zoom	Motor Drive	Telephoto Long Focal	Wide Angle	Video Auto Iris	Iris-Remote	C Mount	Metal Mount	Potentiometer	ND Filter
<b>ZOOM</b>	<b>MOTOR DRIVE</b>	<b>TELE</b>	<b>WIDE</b>	<b>VIDEO</b>	<b>IRIS-REMOTE</b>	<b>C-mt</b>	<b>METAL</b>	<b>PRESET</b>	<b>ND</b>
Extender	RoHS Compliant								
<b>2x</b>	<b>RoHS</b>								

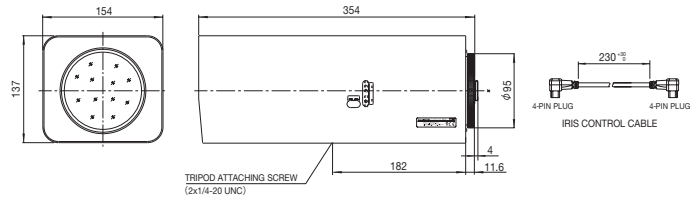

Unit : mm

D60x12.5BE-V41				
		1x	2x	
Focal Length (mm)		12.5 - 750(60x)	25 - 1500(60x)	
Iris Range		F3.8 - T3000 (Equivalent to F3000)	F7.6 - T3000 (Equivalent to F3000)	
Operation	Zoom	Motor Drive		
	Focus	Motor Drive		
	Iris	Auto (Video Type) or Remote <sup>*1*2</sup>		
Angle Of View (HxV)	1/2"	WIDE	28°43' × 21°44'	14°35' × 10°58'
		TELE	0°29' × 0°22'	0°15' × 0°11'
	1/3"	WIDE	21°44' × 16°23'	10°58' × 8°14'
		TELE	0°22' × 0°17'	0°11' × 0°08'
	1/4"	WIDE	16°23' × 12°20'	8°14' × 6°11'
		TELE	0°17' × 0°08'	0°08' × 0°06'
Focusing Range (From Front Of The Lens)(m)		∞ - 5		
Object Dimensions at M.O.D. (HxV) (mm)	1/2"	WIDE	2465 × 1849	1233 × 924
		TELE	41 × 31	21 × 15
	1/3"	WIDE	1849 × 1387	925 × 693
		TELE	31 × 23	16 × 12
	1/4"	WIDE	1387 × 1040	693 × 520
		TELE	23 × 17	12 × 9
Back Focal Distance (in air) (mm)		53.23	31.10	
Exit Pupil Position (From Image Plane) (mm)		-77	-38	
Filter Thread (mm)		M107 × 1		
Mount		C		
Extender		2x		
Mass (kg)		5.1		
Standard Accessories		Iris Control Cable Connection Connector(15-pin)		
Remarks		•With Metal Mount (*1)When power is turned off, iris will automatically close.		

