

# Zoom (72mm)

## Y12x6A-YE2

12x Applicable camera (model) 1 2/3 1/2 1/3 1/4 For Security




\* Photograph is a similar model.

Applicable to  
**1/3**




RoHS Compliant  
**RoHS**

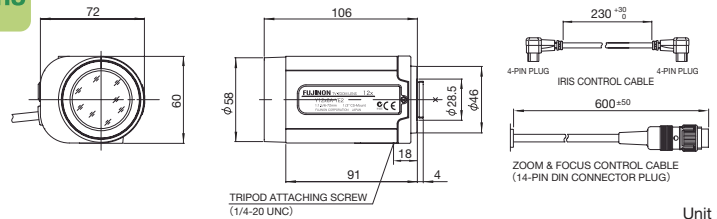

Unit : mm

Y12x6A-YE2			
Focal Length (mm)		6 - 72(12x)	
Iris Range		F1.5 - T400(Equivalent to F400)	
Operation	Zoom	Motor Drive	
	Focus	Motor Drive	
	Iris	Auto(DC Type)*1	
Angle Of View (HxV)	1/3"	WIDE	43°36' × 33°24'
		TELE	3°49' × 2°52'
	1/4"	WIDE	33°24' × 25°22'
		TELE	2°52' × 2°09'
Focusing Range (From Front Of The Lens) (m)		∞ - 1.3	
Object Dimensions at M.O.D. (HxV) (mm)	1/3"	WIDE	1003 × 753
		TELE	84 × 63
	1/4"	WIDE	752 × 565
		TELE	63 × 47
Back Focal Distance (in air) (mm)		11.69	
Exit Pupil Position (From Image Plane) (mm)		-6028	
Filter Thread (mm)		M55 × 0.75	
Mount		CS	
Mass (g)		350	
Coil Resistance		Drive Coil 180Ω Damping Coil 720Ω	
Current Consumption		22mA(Max.) at DC 4V	
Standard Accessories		Iris Control Cable Conversion Cable (10-pin)	
Remarks		•With Metal Mount (*1) When power is turned off, iris will automatically close.	

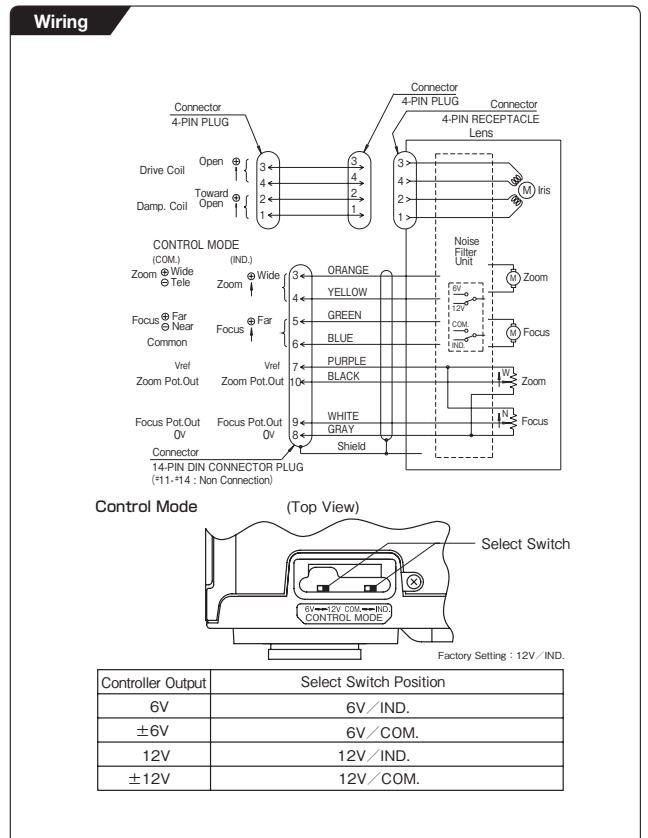

### Accessories

#### Close-up Lens

Product Name		CL3355 (M55x0.75mm fc=333mm)	CL10055 (M55x0.75mm fc=1000mm)
Imaging Area(mm)		333 - 265	1000 - 565
Object Dimensions (mm)	1/3"	WIDE	204 × 153
		TELE	17 × 13
	1/4"	WIDE	153 × 115
		TELE	13 × 10